
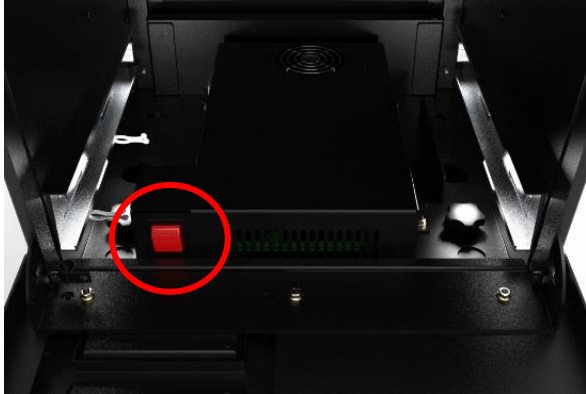
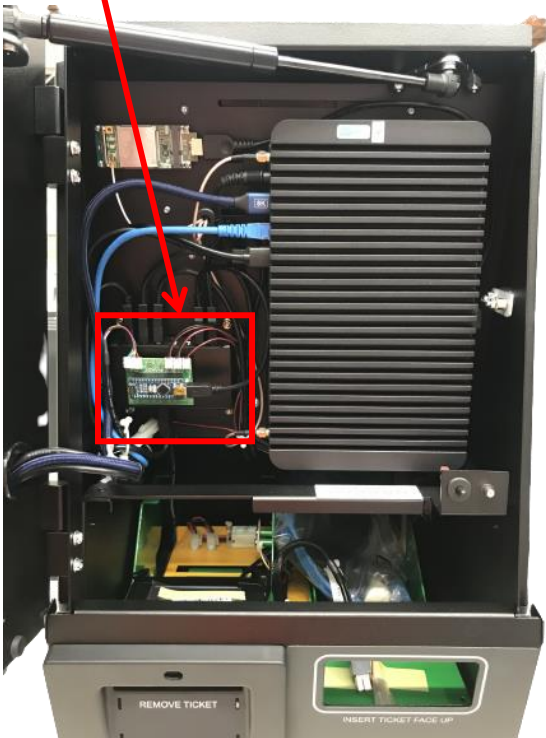


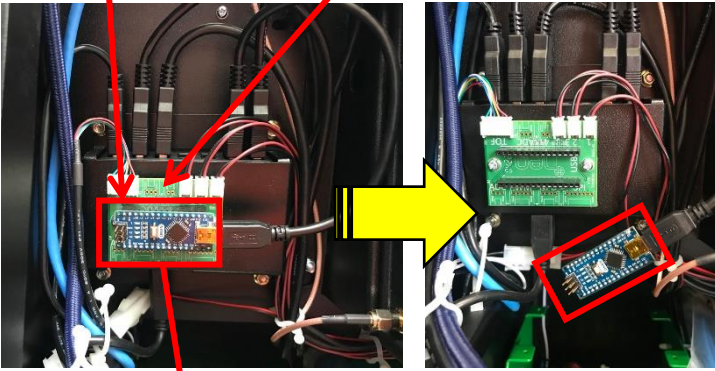

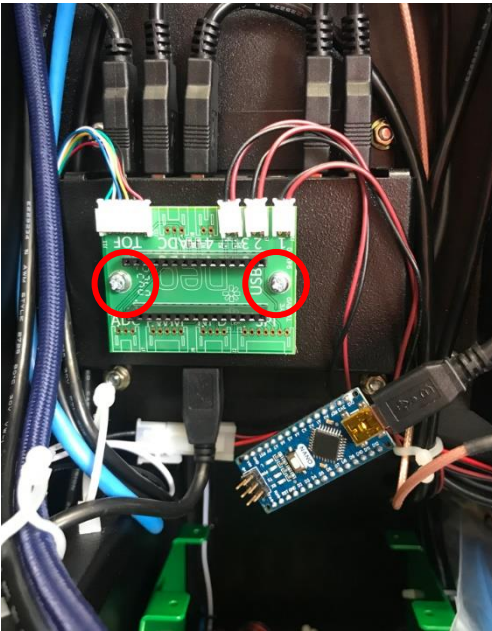

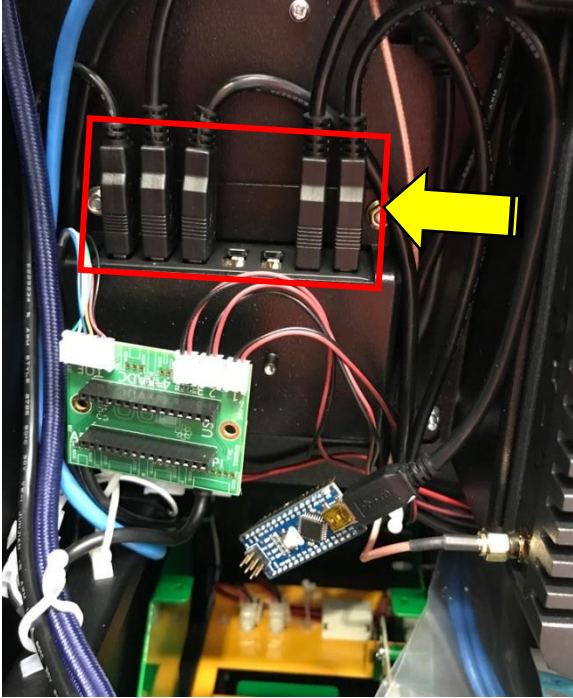
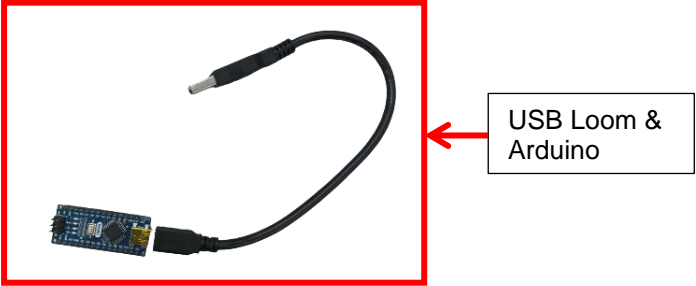
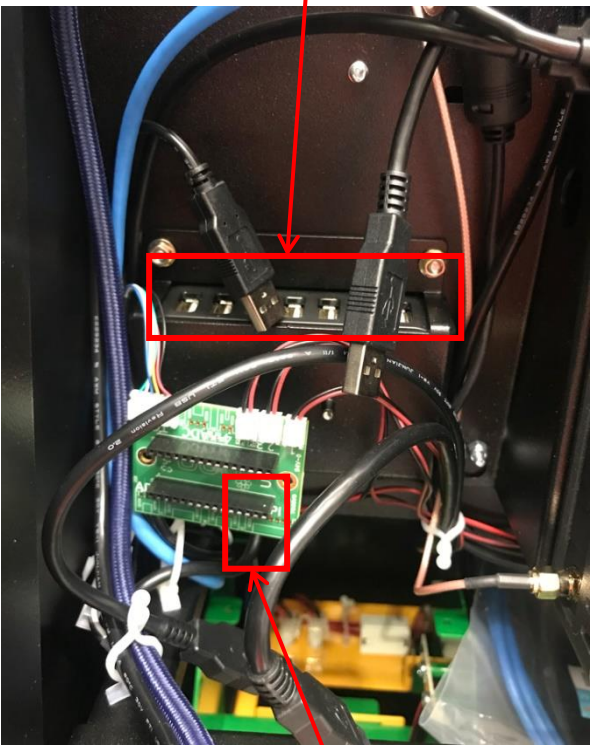
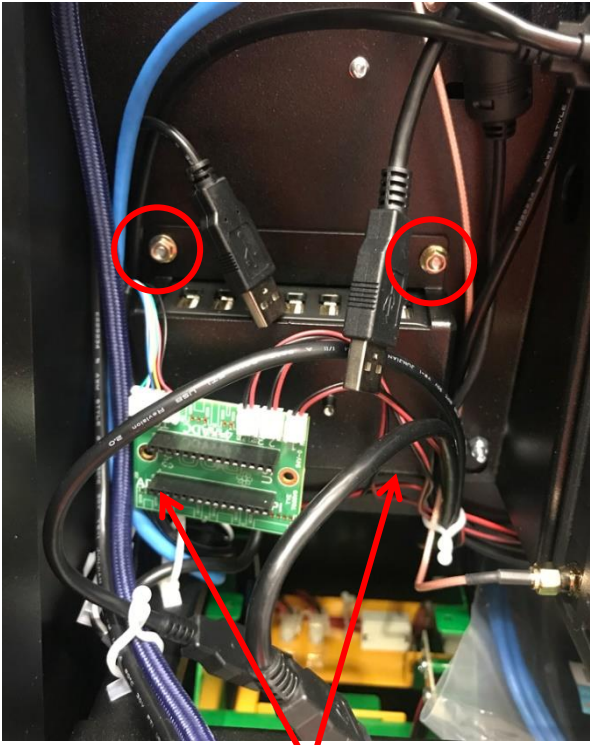
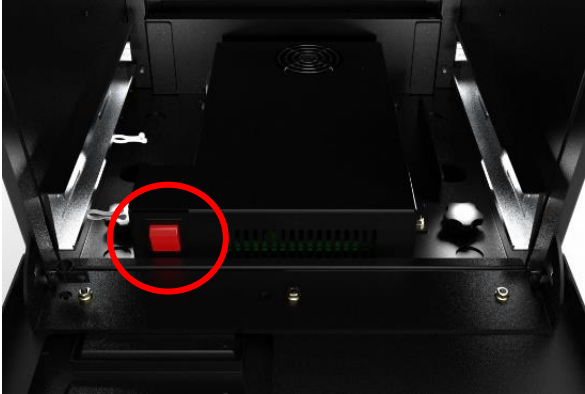


STEP	IMAGE	DESCRIPTION
1		<p>Unlock and open the LCD Screen Door and Lower Door by unlocking the Lock at the Right-hand side of the Kiosk using the SOUTHCO KEY# T0001.</p> <p>This provides access to the Kiosk internals.</p> <p>Note: The SST SPARE D-LINK 7 PORT HUB Work Instruction is common for all Kiosk variants.</p>
2		<p>Prior to starting the installation of the SST SPARE D-LINK 7 PORT HUB, switch the plug from I → O on the Power Tray located on the inside of the Kiosk.</p> <p>NOTE: Components removed for clarity.</p>
3	<p>D-LINK 7 PORT HUB</p> 	<p>The D-LINK 7 PORT HUB is in the Main Frame against the rear wall.</p>

STEP	IMAGE	DESCRIPTION
4	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>ARDUINO</p>  </div> <div style="text-align: center;"> <p>ARDUINO NANO SHIELD</p>  </div> </div>   <p style="text-align: center;">Rock the Arduino side to side to remove the pins from the ARDUINO NANO SHIELD</p>	<p>Remove the Arduino from the ARDUINO NANO SHIELD by holding with two (2) fingers through the middle. Rock the Arduino side to side to remove the pins from the ARDUINO NANO SHIELD.</p> <p>Store the Arduino in a resting position as shown. Ensure that the pins located at the back of the Arduino are protected.</p>
5		<p>Remove & retain 2x M3 Screws fastening the ARDUINO NANO SHIELD to the D-LINK 7 PORT HUB Bracket using a #2 Phillips Head Screwdriver.</p>

STEP	IMAGE	DESCRIPTION
6		<p>Store the ARDUINO NANO SHIELD in a resting position as shown.</p>
7	 	<p>Chase the Arduino USB Plug to the D-LINK 7 PORT HUB and remove.</p> <p>The USB Loom & Arduino will now be completely removed from the Kiosk. Store for refitment in later Step.</p>

STEP	IMAGE	DESCRIPTION
8	 <p data-bbox="443 271 783 331">Remove 4x USB Plugs</p> <p data-bbox="520 1128 844 1189">PC Black Plug (hidden)</p>	<p data-bbox="1015 282 1501 342">Remove 4x USB Plugs from the D-LINK 7 PORT HUB to condition shown.</p> <p data-bbox="1015 376 1477 465">Remove the PC Black Plug from the underside of the D-LINK 7 PORT HUB (hidden).</p>
9	 <p data-bbox="520 2011 775 2072">2x Nuts (hidden)</p>	<p data-bbox="1015 1240 1501 1361">Remove & retain 4x Nuts retaining the D-LINK 7 PORT HUB Bracket to the Kiosk using a 7mm Socket Head Drive & Handle.</p>

STEP	IMAGE	DESCRIPTION
10		<p>Once the D-LINK 7 PORT HUB has been removed from the Kiosk, place onto a table as orientation as shown.</p> <p>Push the D-LINK 7 PORT HUB out from the Bracket (one-way direction only).</p>
11		<p>Remove D-LINK 7 PORT HUB from packaging.</p> <p>To re-install the replacement D-LINK 7 PORT HUB, follow Steps 4 to 10 in reverse.</p>
12		<p>Switch the plug from O → I on the Power Tray located on the inside of the Kiosk.</p> <p>NOTE: Components removed for clarity.</p>
13		<p>Stage 1: Push in green tray and close Lower Door.</p> <p>Stage 2: Close & lock the LCD Screen Door via the Lock at the Right-hand side of the Kiosk using the key provided.</p>