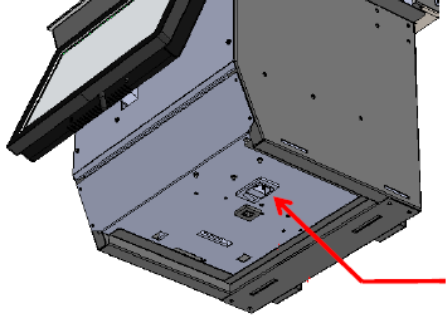














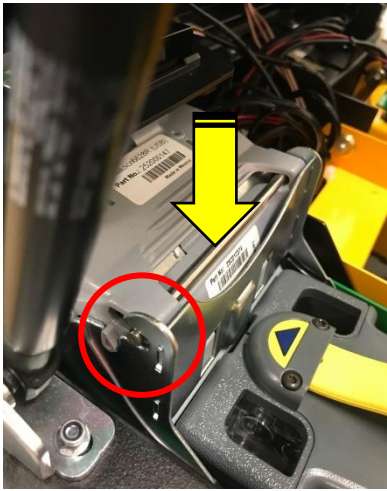

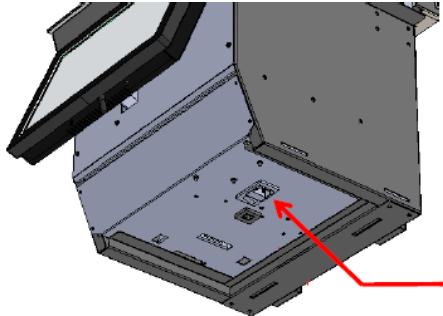


STEP	IMAGE	DESCRIPTION
1		<p>Prior to starting the TSST SPARE MEI BV MODULE, switch the plug from I → O on the underside of the Kiosk.</p> <p>Remove the Power Lead &amp; Network Cable.</p>
2		<p>Unlock and open the Top Door by pushing the Button on the RH side of the Top Door.</p>
3		<p>The BNA Mount Assembly is located on the LH side of the Kiosk as shown.</p>
4		<p>The SCN ADVANCE NOTE ACCEPTOR USB is located at the back of the BNA Mount Assembly as shown.</p>

STEP	IMAGE	DESCRIPTION
5		<p>To remove the SCN ADVANCE NOTE ACCEPTOR USB, lift the horizontal pin in an upwards direction to dis-engage from the bracket.</p>
6		<p>Pull the SCN ADVANCE NOTE ACCEPTOR USB in an outwards direction to completely remove from the BNA Enclosure.</p>
7		<p>Remove the SST SPARE MEI BV MODULE DESKTOP BNA from packaging.</p>

STEP	IMAGE	DESCRIPTION
8		<p>Place the SCN ADVANCE NOTE ACCEPTOR USB onto a table.</p>
9		<p>Clip the SCN ADVANCE BEZEL KIT UPSTACK Connector into the SCN ADVANCE NOTE ACCEPTOR USB as shown.</p>
10		<p>Push the SCN ADVANCE BEZEL KIT UPSTACK onto the SCN ADVANCE NOTE ACCEPTOR USB.</p> <p>Ensure that a “clip” sound is heard when pushing the SCN ADVANCE BEZEL KIT UPSTACK into place.</p>

STEP	IMAGE	DESCRIPTION
11		<p>Select BNA BEAK COVER.</p>
12		<p>Push the BNA BEAK COVER onto the SCN ADVANCE NOTE ACCEPTOR USB.</p> <p>Ensure that a “clip” sound is heard when pushing the BNA BEAK COVER into place.</p>
13		<p>To re-install the replacement SST SPARE MEI BV MODULE DESKTOP BNA, follow Steps 5 to 6 in reverse.</p> <p>Ensure that the guide tab aligns with the bracket groove highlighted.</p>

STEP	IMAGE	DESCRIPTION
14		<p>When the SCN ADVANCE NOTE ACCEPTOR USB is pushed in, check that the pin is locked into position e.g.: down position.</p>
15		<p>Close the Top Door by pushing down waiting for a “click” to indicate locked position.</p>
16		<p>Install the Power Lead &amp; Network Cable to the underside of the Kiosk.</p> <p>Switch the plug from O → I.</p>